


nyloflex[®] Dryer FIV-V D

Premium quality system for drying of photopolymer flexo printing plates

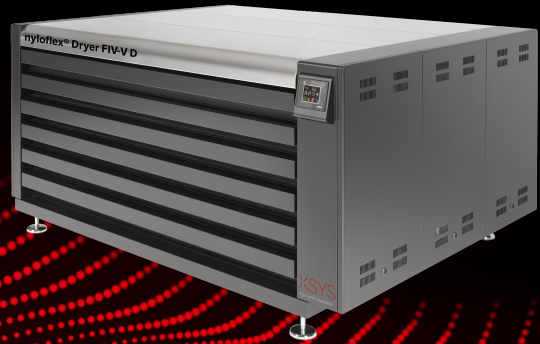

Wide web format, suitable for processing high quality photopolymer plates up to a maximum size of 1320 mm x 2030 mm (52" x 80")

Excellent productivity and consistency

- + Uniform temperature distribution through the three separate drying chambers
- + Touch screen displays all necessary times and settings and offers counters of operating hours
- + High efficient exhaust air extraction system for maximum efficiency and safety.
- + Adjustable start time for pre-warming prior start of daily production
- + Adjustable temperature of whole dryer unit for consistent drying results.



Ecologically friendly and economical

- + Three chamber design with temperature control for energy saving and efficiency
- + Low energy consumption due to heat insulation

Easy and comfortable handling

- + Easy to operate via display
- + Six drying drawers with wide opening and mechanical support of drawer opening and closing
- + Programmable digital timer and count down facility for each drying drawer
- + Audio alarm to signal end of drying time
- + Automatic shutdown after last plate possible
- + Optional remote accessibility and diagnostics available

Equipment Dimensions

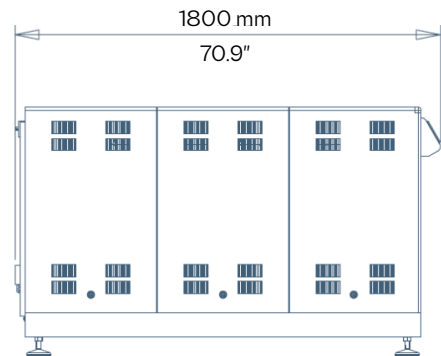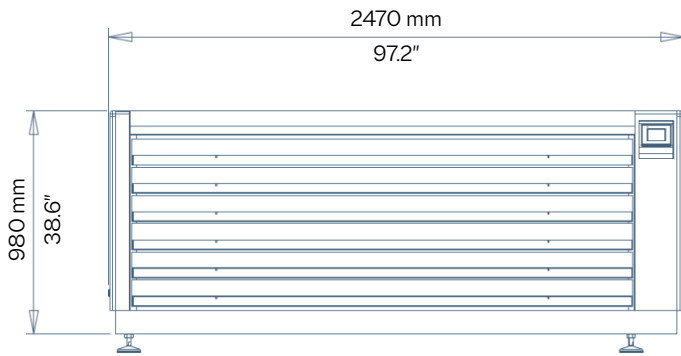

Technical data

nyloflex® Dryer FIV-V D

Maximum plate size (W x L)	1320 mm x 2030 mm (80.0" x 52.0")
Electrical connection	230 V, 50/60 Hz (3 Ph/PE) / 400 V, 50/60 Hz (3 Ph/N/PE)
Nominal current	14 A / 8 A
Nominal power	4.8 kW
Exhaust air flow rate	1 x 80 mm Ø - 100 m ³ /h
Weight (approx.)	650 kg (1433 lbs) net 1090 kg (2403 lbs) gross
Crate dimensions (W x D x H)	2730 x 1980 x 1480 mm (107,5" x 77,8" x 58,3")
Recommended ambient temp.	20 - 25 °C (68 - 77 °F)

Please contact us for additional information.

info@xsyglobal.com • www.xsyglobal.com

The aim of our technical documents is to inform and advise our customers. The information provided herein is correct to the best of XSYS's knowledge. No liability for any errors, facts or opinions is accepted. Customers must satisfy themselves as to the suitability of this product for their application. No responsibility for any loss as a result of any person placing reliance on any material contained herein will be accepted. Product names followed by ® are trademarks registered by XSYS Germany GmbH and/or its affiliates.



XSYS 11 - 2023
Print solid. Stay flexible.